
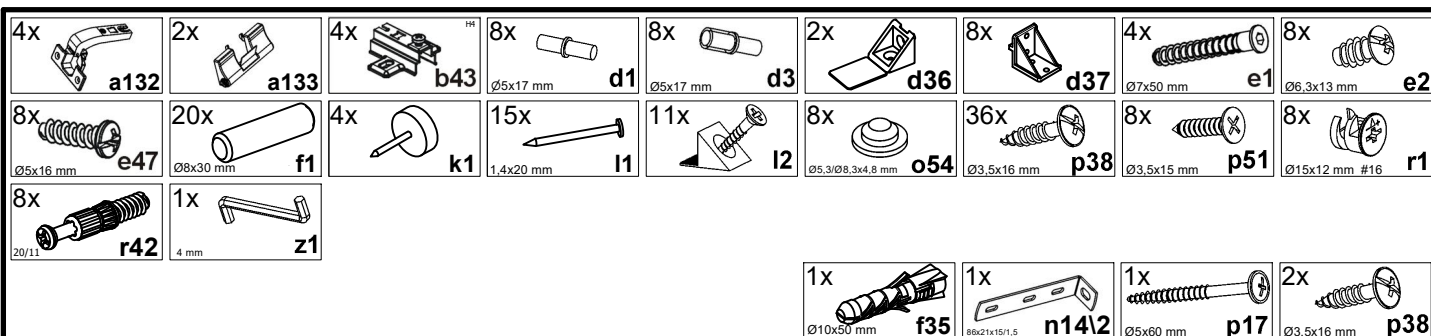
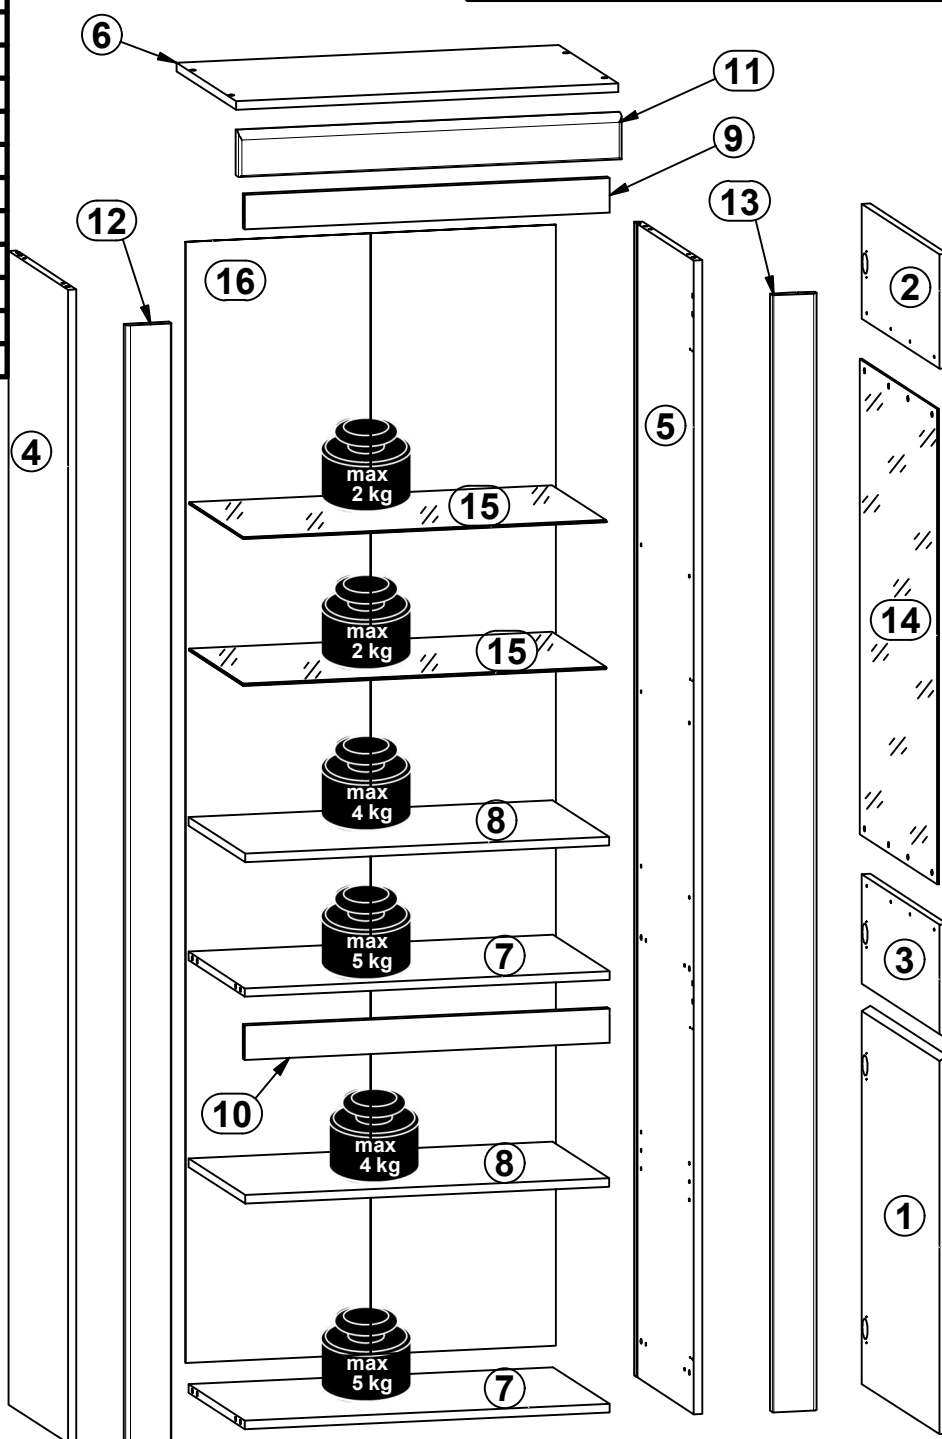
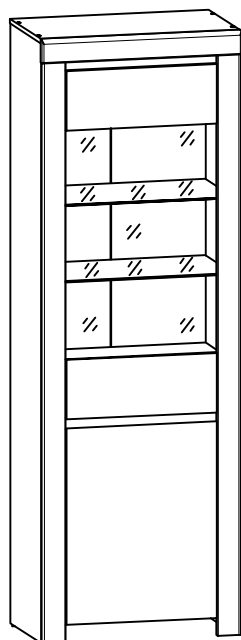


A









HOLTEN

S440-REG1D1W


A	B	C	D
1	S440-0020	660	515
2	S440-0021	515	200
3	S440-0022	515	200
4	S440-1041	2014	396
5	S440-1042	2014	396
6	S440-2011	680	396
7	S440-3025	649	376
8	S440-3026	648	376
9	S440-4020	649	60
10	S440-4044	649	60
11	S440-5023	682	80
12	S440-5044/A	1950	80
13	S440-5045/A	1950	80
14	S440-5046	830	514
15	S440-5047	647	360
16	S440-9304	1957	659

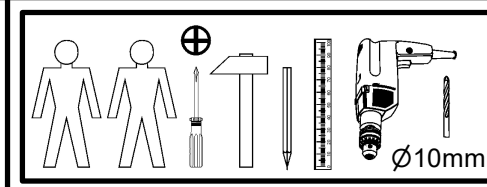


1  §2

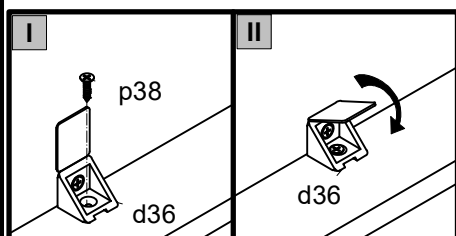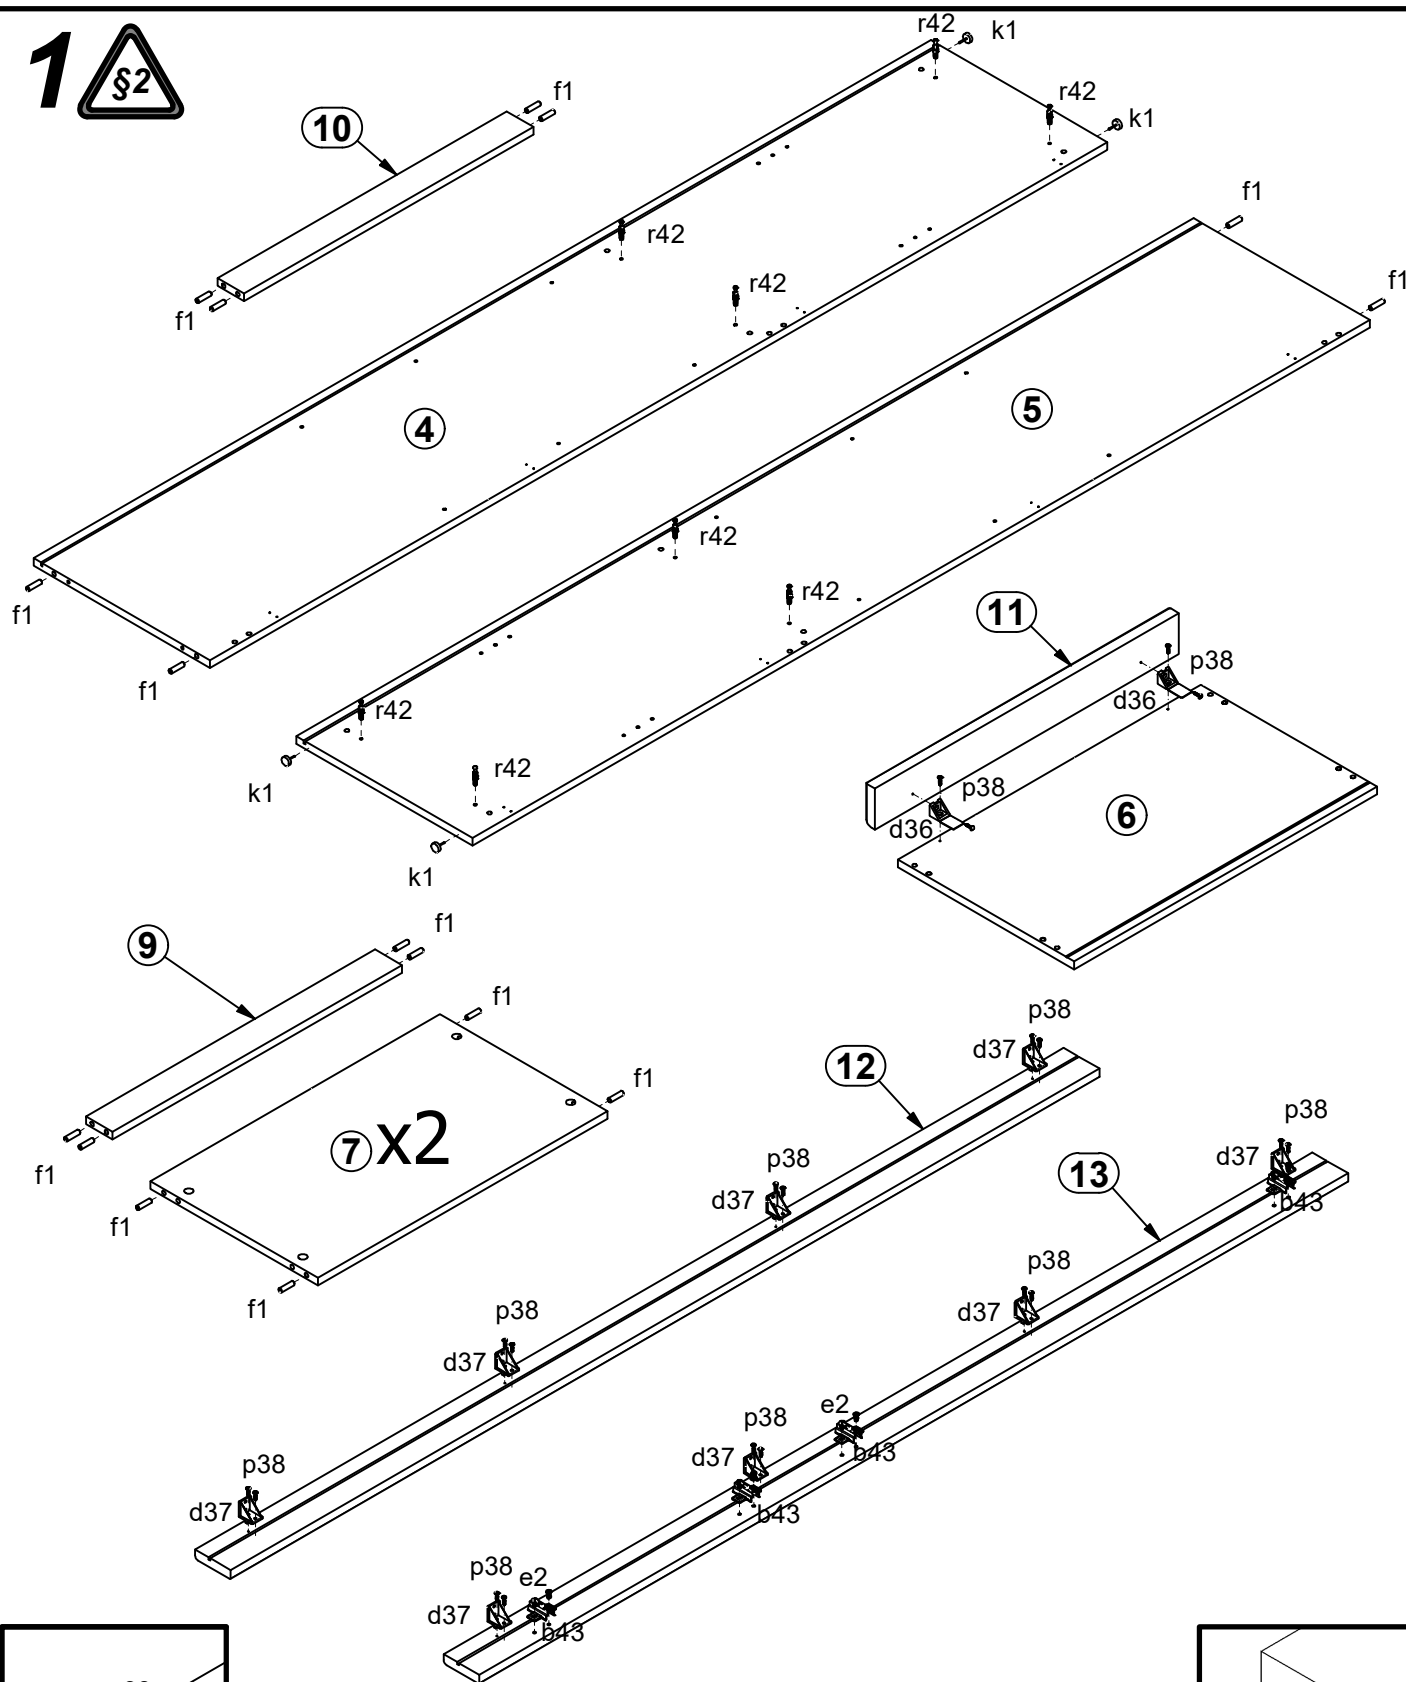



2

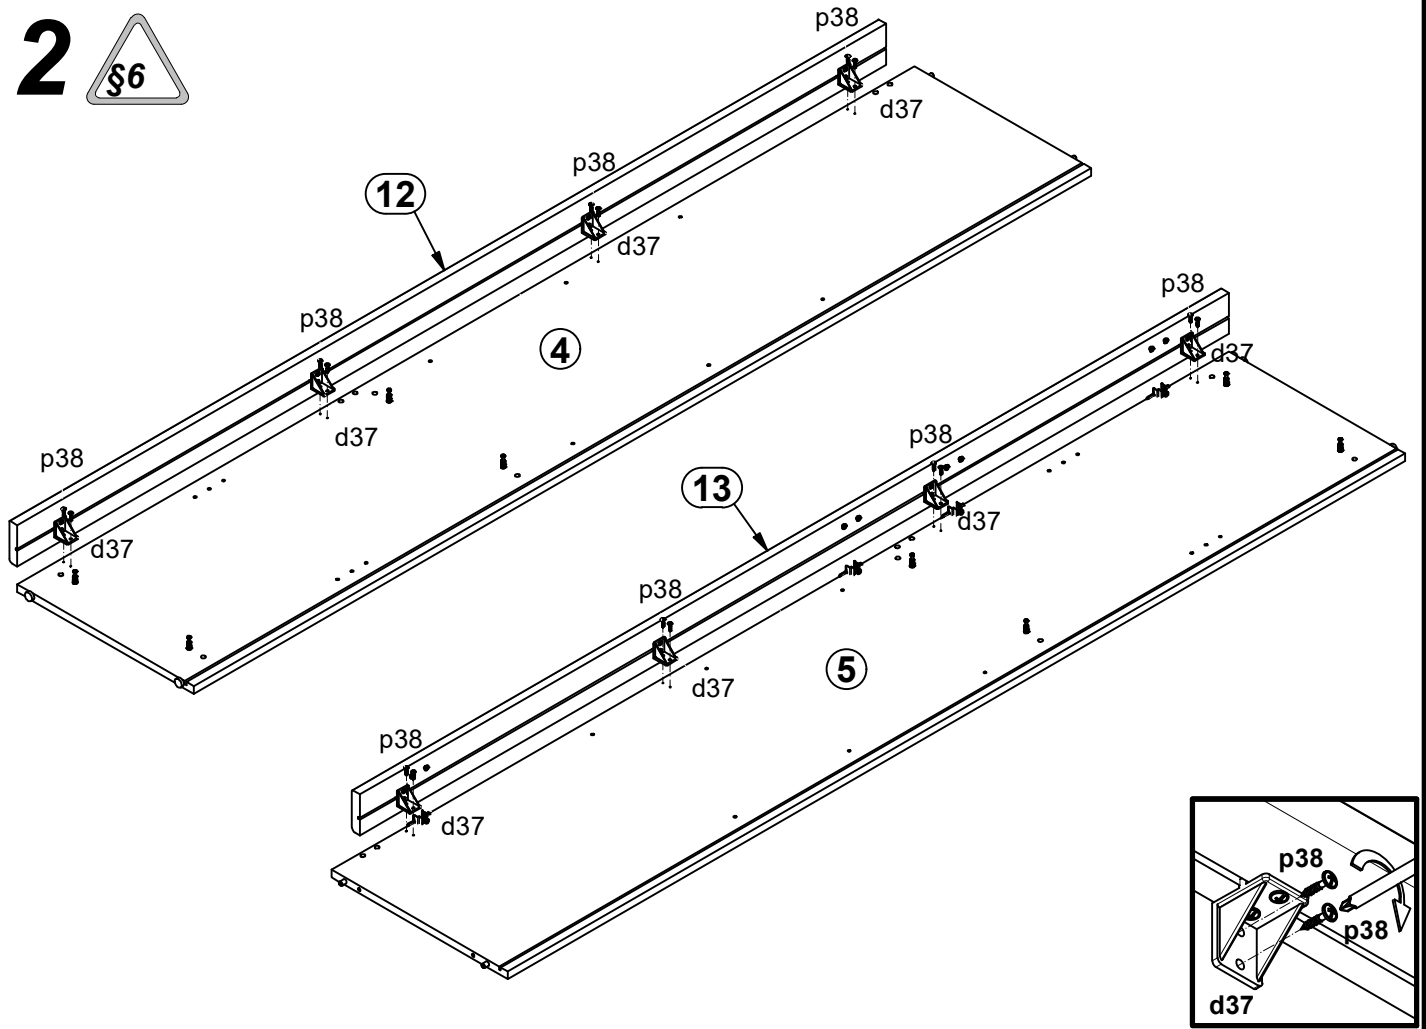

3

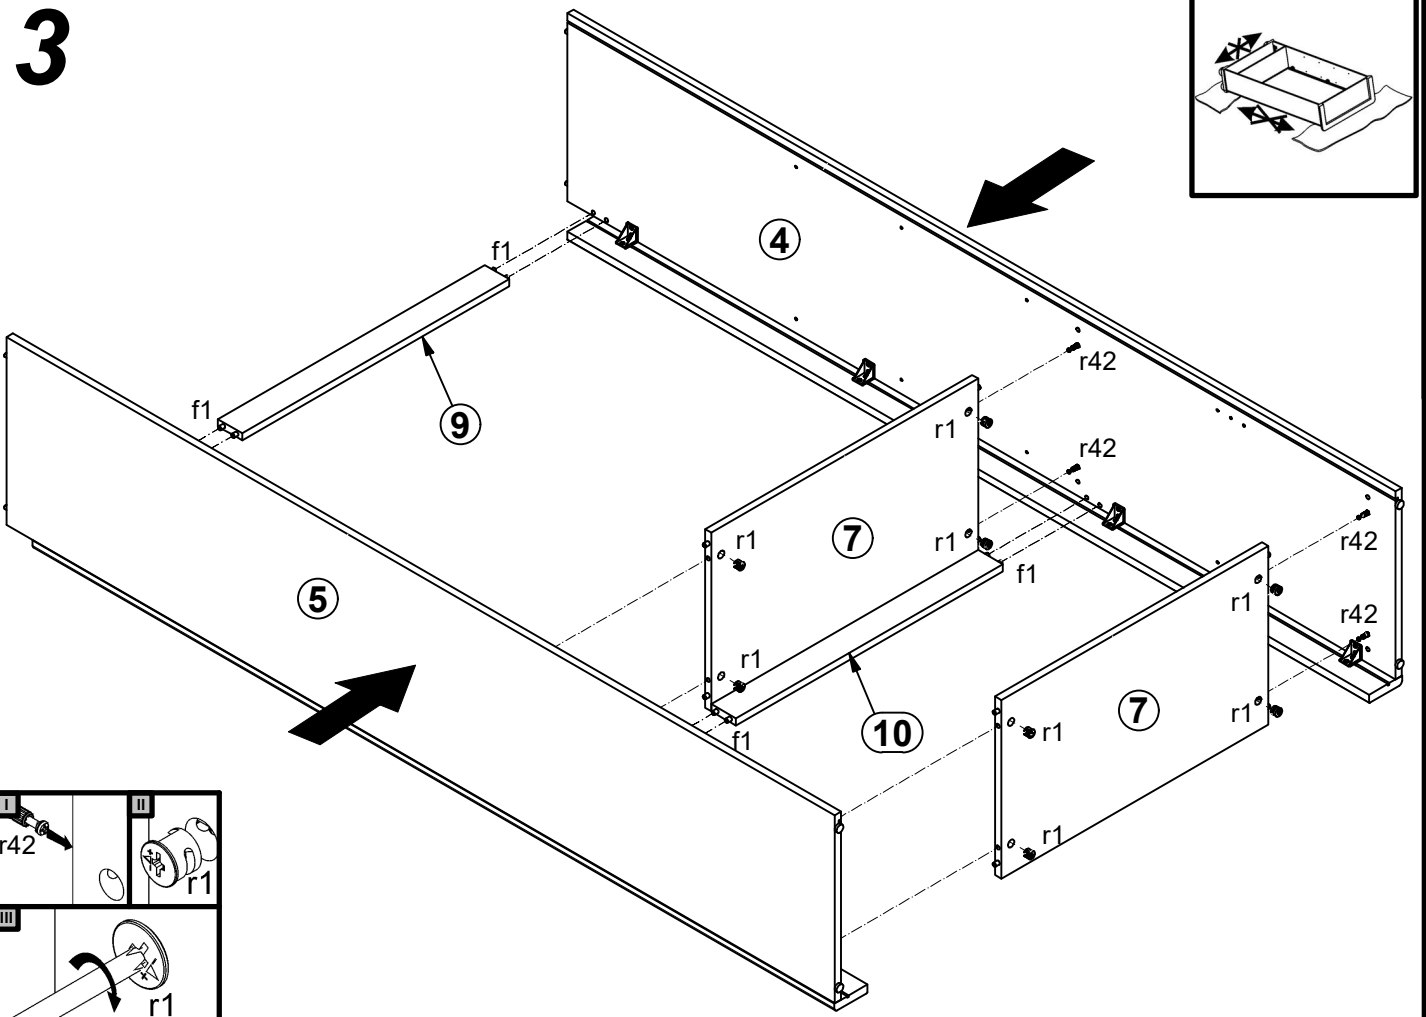

4

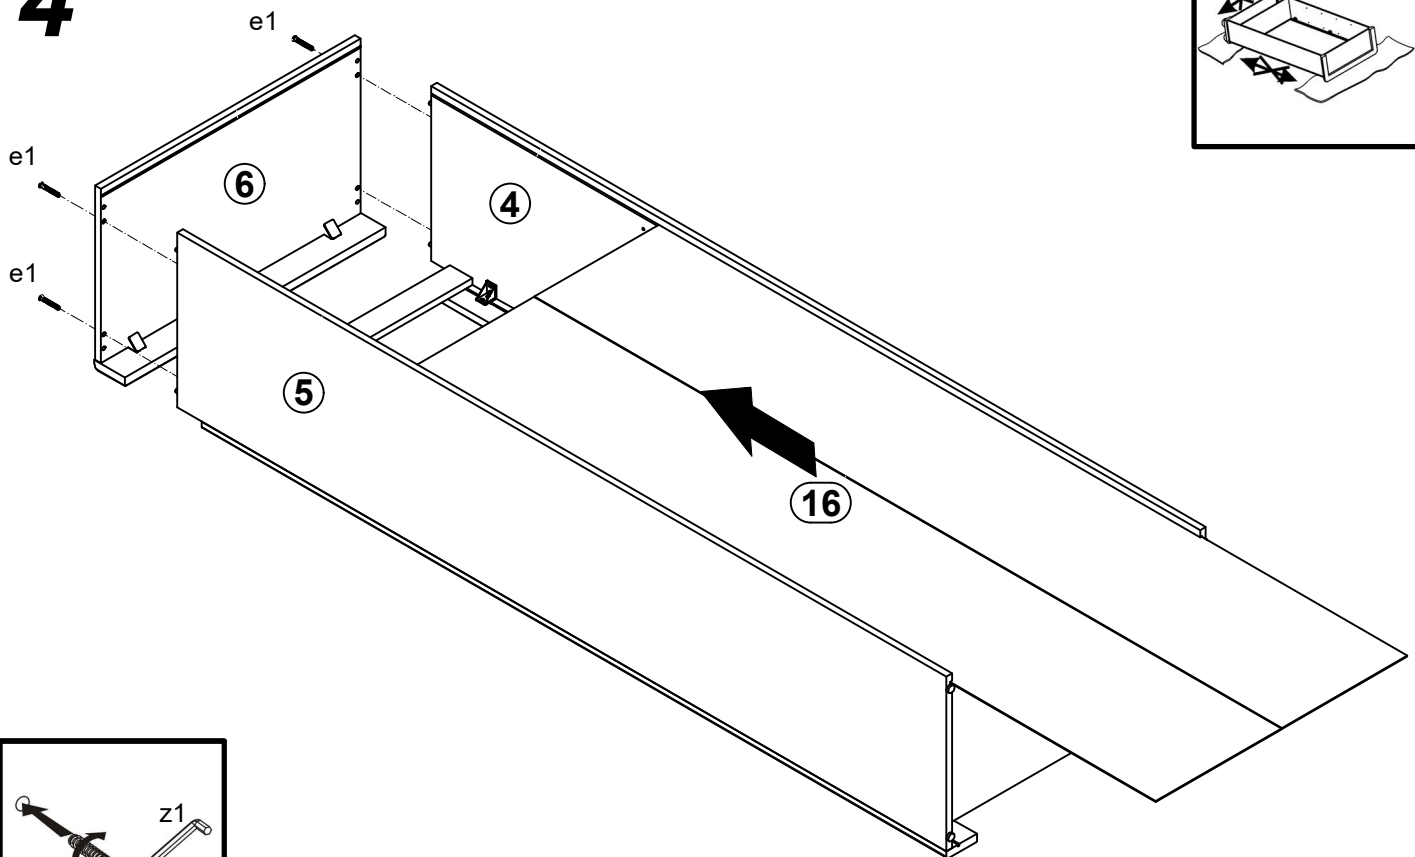

5











Diagram illustrating the assembly of the top plate (14) onto the bottom plate (13). The diagram shows the following steps:

- Step 1: The bottom plate (13) is shown with pins p51 and a132.
- Step 2: The top plate (14) is shown being aligned with the bottom plate.
- Step 3: The top plate (14) is shown being secured with pins e47 and o54.

A warning triangle with the text "\$11" indicates the cost of a mistake.

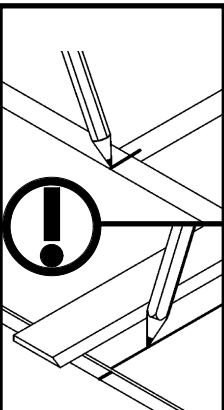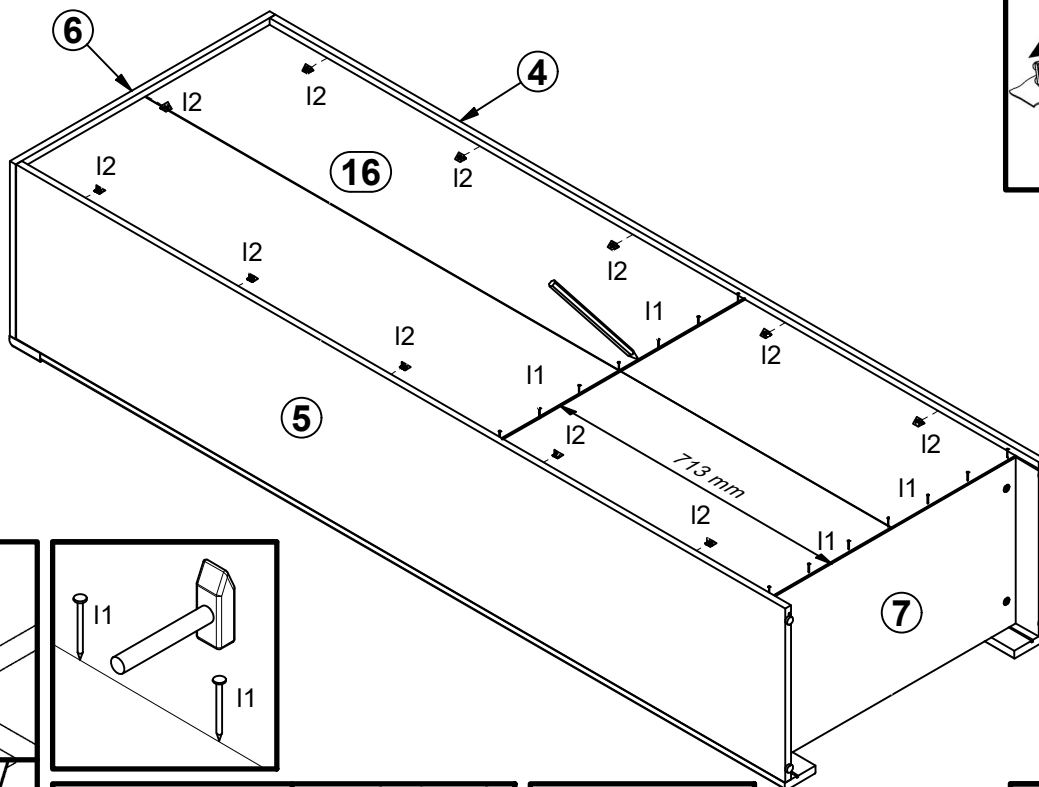